


Key Feature

- Modular door station Nametag unit, needs mounting bracket
- 6 call buttons, including 4 button covers; IP65
- Dial the resident at one touch
- Backlight compensation
- Easy to and extend

Typical Application

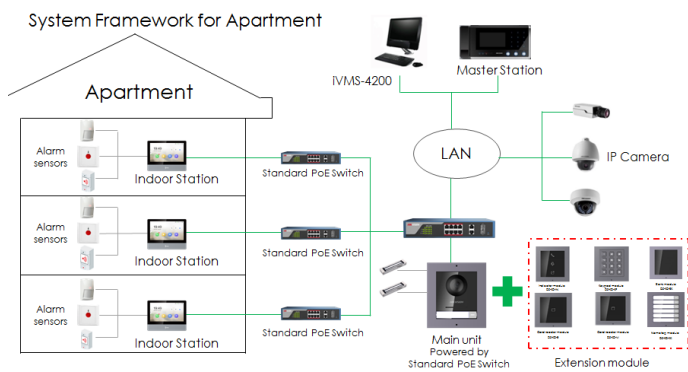

Approval

CE-EMC	a. EN 55032:2015 b. EN 61000-3-2:2014 c. EN 61000-3-3:2013 d. EN 50130-4:2011 +A1:2014
CE-LVD	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013
CB	IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
FCC-SDOC	47 CFR Part 15, Subpart B
C-	AS/NZS CISPR 32:2015

TICK(EMC)	
UL	UL 60950-1 & CAN/CSA C22.2 No. 60950-1-07, Information Technology Equipment – Safety – Part 1: General Requirements
ROHS	2011/65/EU
REACH	Regulation (EC) No 1907/2006
WEEE	2012/19/EU


Specification

System parameters	
Processor	Embedded Linux operation system
Network parameters	
Communication protocol	TCP/IP, RTSP
Wired network	10/100 Mbps self-adaptive Ethernet
Interfaces	
RS-485	2
General	
Button	6
Installation	Flush mounting, surface mounting
Weight	529 g (with packaging) 265 g (without packaging)
Protective level	IP65, IK07
Working temperature	-40 °C to +55 °C(-40 °F to 131 °F)
Working humidity	10% to 95%
Dimensions	98.5 mm × 100 mm × 34.2 mm (3.87" × 3.95" × 1.33")
Power supply	12 VDC (powered for other module)
Application environment	Outdoor
Power consumption	0.8W

Available Model


DS-KD-KK/S

Appearance and Interfaces

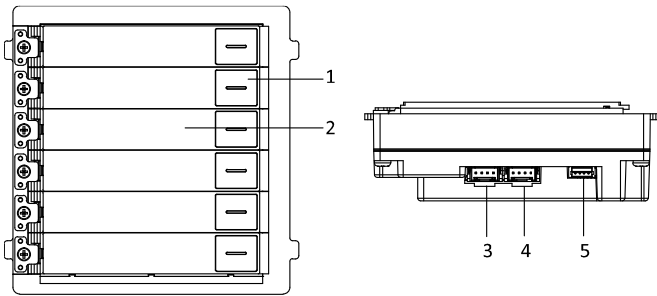

No.	Description
1	Call Button
2	Nametag
3	Module-connecting Interface (output)
4	Module-connecting Interface (input)
5	Debug Port

Dimension

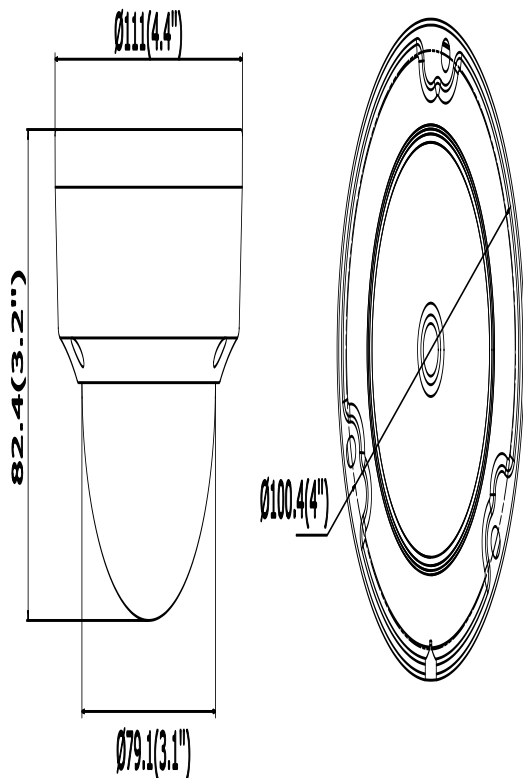


Unit: mm

Accessory

Optional




DS-KD-ACF1/Plastic



DS-KD-ACF2/Plastic



DS-KD-ACF3/Plastic



DS-KD-ACW1



DS-KD-ACW2



DS-KD-ACW3



DS-KD-ACF1/S



DS-KD-ACF2/S



DS-KD-ACF3/S



DS-KD-ACW1/S



DS-KD-ACW2/S



DS-KD-ACW3/S

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

