

DS-KD-TDM
Modular Door Station

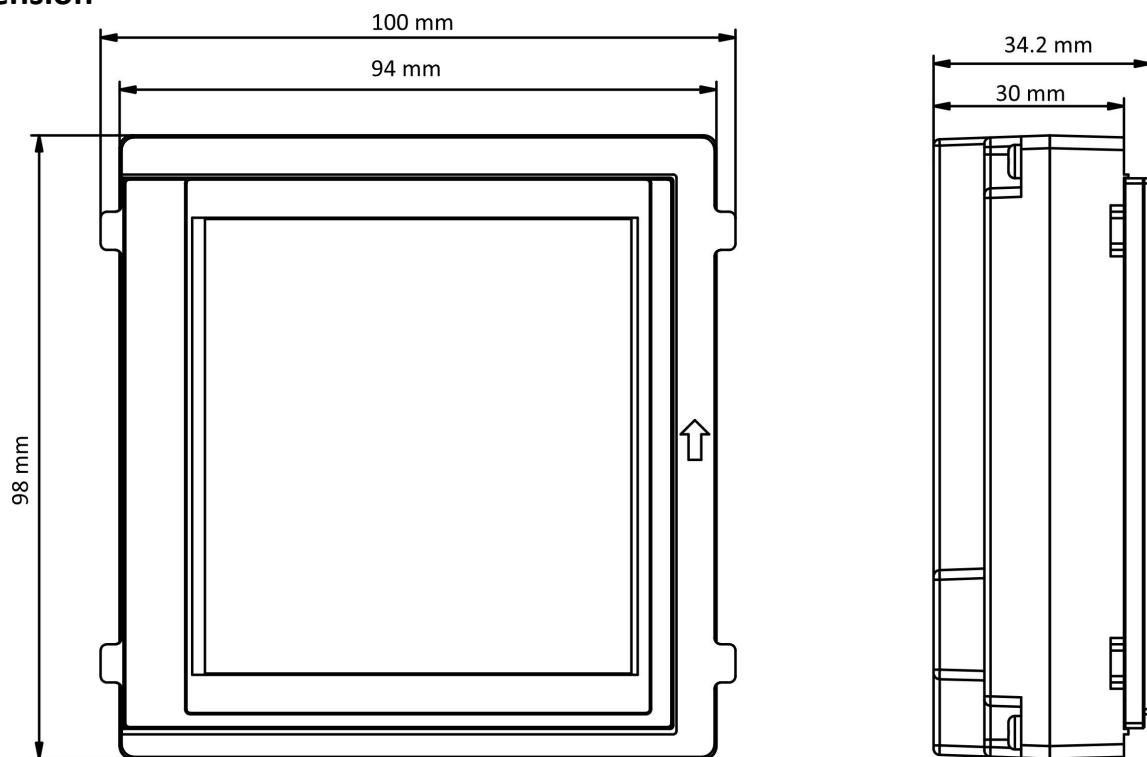
- Touch display module with Mifare card reader of modular door station
- 4-inch touch screen with rich information display: Dial number, pin code unlock, contact list, advertisement
- Store up to 2000 contacts
- IP65 and IK08 higher protection level
- Support multiple languages

▪ Specification

System parameters	
Operation system	Linux
ROM	32 MB
RAM	128 MB
Display parameters	
Screen size	4-inch
Type	IPS
Resolution	480 × 480
Brightness	Adjustable, Max.500 cd/m ²
Audio parameters	
Audio input	/
Audio compression standard	/
Audio output	1 buzzer
Audio quality	/
Volume adjustment	/
Loudspeaker consumption	/
Network parameters	
Wireless network	AP mode
Authentication	
Card reading frequency	13.56 MHz
Card reading distance	2 cm
Card type	M1 card
Device interfaces	
TF card	Reserved
DIP switch	8 bits
Two-wire cascading interface	2
General	
Installation	Flush mounting, surface mounting
Protective level	IP65, IK8
Working temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Working humidity	10% to 95% (no-condensing)
Dimension (W × H × D)	100 mm × 100 mm × 35 mm (3.94" × 3.94" × 1.38")
Power supply	12 VDC, supplied by the main module
Power consumption	≤ 4 W
Language	English, French, Portuguese, Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek

▪ Available Model

DS-KD-TDM

▪ Dimension

▪ Accessory

▪ Optional

DS-KD8003-IME1(B)	DS-KD8003-IME1(B)/S	DS-KD8003-IME1(B)/NS	DS-KD8003-IME1(B)/Surface	DS-KD8003Y-IME2/ S
				
DS-KD8003Y-IME2/ NS		DS-KD8003Y-IME2	DS-KD-PMR	
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

